

VLBG-PLUS 6,7t M30 : anneau arqué à étrier avec vis

Artikel-Nr:

8504661




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrud-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
 - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-HM-36:2021-09
Certificate No.: HM 220053
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning Actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

VLBG-PLUS 6,7t M30 : anneau arqué à étrier avec vis

Artikel-Nr: 8504661

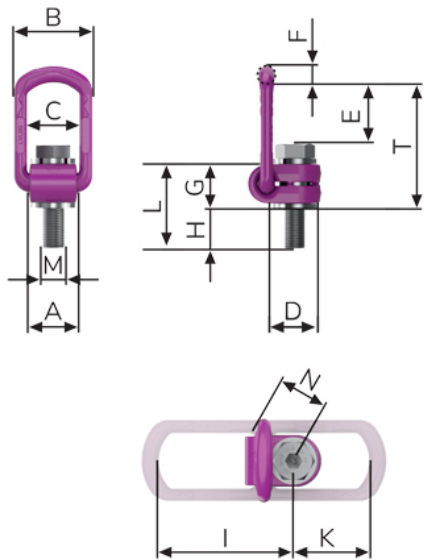

poids	3.22 kg	7.10 lbs
CMU	6700 kg	14770 lbs
T	147 mm	5-25/32"
A	60 mm	2-3/8"
B	103 mm	null
null	4-1/16"	null
C	65 mm	2-9/16"
D	60 mm	2-3/8"
E	67 mm	2-5/8"
F	22,5 mm	7/8"
G	61 mm	2-13/32"
H	49 mm	1-15/16"
I	151 mm	5-15/16"
K	80 mm	3-1/8"
L	110 mm	4-11/32"
M	M30 mm	M30
N	67 mm	2-5/8"