

NEW

3FLEX-LIGHT

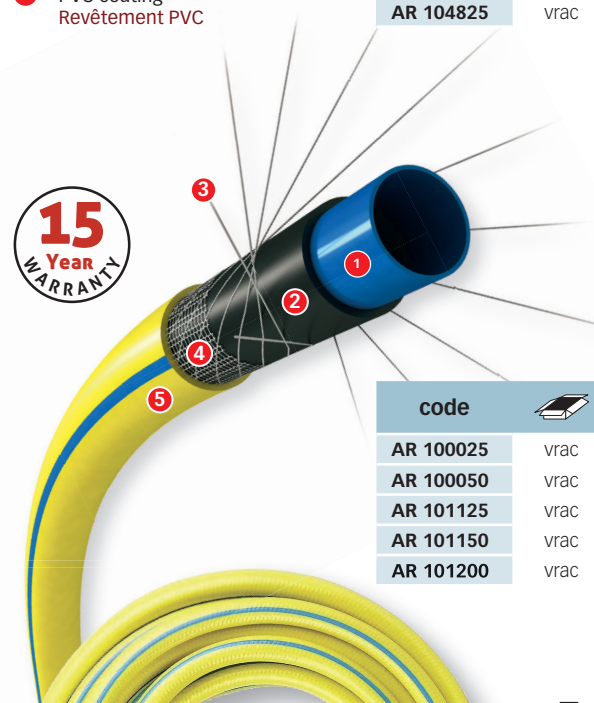

3 layers QUALITY

- 1 PVC-anti-algen
PVC anti-algue
- 2 Gevlochten tricot
Tricotage
- 3 PVC coating
Revêtement PVC

-20°/+60°

24
 BAR

code			i				min.
AR 104825	vrac	5420000073692	5/8" - 15 mm x 25 m	4,200 kg	48	1	1



ULTRA-5FLEX

code			i				min.
AR 100025	vrac	5420000070462	5/8" - 15 mm x 25 m	4,200 kg	48	1	1
AR 100050	vrac	5420000070479	5/8" - 15 mm x 50 m	8,400 kg	30	1	1
AR 101125	vrac	5420000070486	3/4" - 19 mm x 25 m	5,500 kg	36	1	1
AR 101150	vrac	5420000070493	3/4" - 19 mm x 50 m	11,000 kg	20	1	1
AR 101200	vrac	5420000073494	3/4" - 19 mm x 100 m	22,800 kg	10	1	1

5 layers QUALITY

- 1 Voedselveilige PVC-anti-algen
PVC alimentaire anti-algue
- 2 Geëxpandeerd PVC
PVC expansé
- 3 12 tegenovergestelde nylon draden
12 fils de nylon opposés
- 4 Gevlochten tricot
Tricotage
- 5 PVC UV-beschermende coating
Revêtement PVC anti-UV

 HIGH TECH
 ANTI-TORSION

-20°/+60°

 Cd (Cadmium)
 Ba (Barium)
FREE

 UV
 PROTECT

25
 BAR

ANTI-ALGE

 Zero
 WASTE
