


AR - ISORYL schroevendraaier voor sleufschroeven - gefreesd bled



IMAGE UNAVAILABLE

Description:

- Rond gefreesd bled om bij diepliggende schroeven te kunnen.
- Uitvoering: verchroomd, gepolijst.

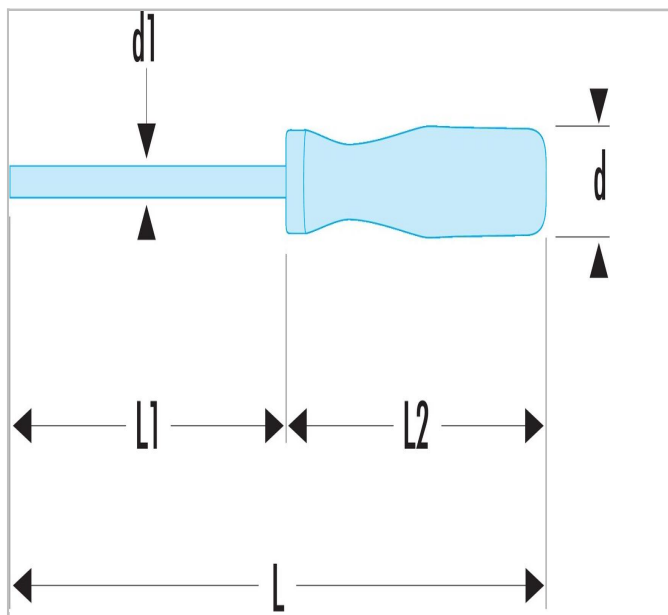

	a [mm]	Diameter [mm]	Lengte [mm]	Lengte [mm]	Dikte [mm]	Gewicht [g]	Lengte L1 [mm]	Diameter D1 [mm]
AR.2.5X50	2.5	16.0	120.0	70.0	0.4	15.0	50.0	2.5
AR.2.5X75	2.5	16.0	145.0	70.0	0.4	16.0	75.0	2.5
AR.2X40	2.0	16.0	110.0	70.0	0.4	13.0	40.0	2.0
AR.3.5X100	4.0	20.5	180.0	80.0	0.8	33.0	100.0	3.5
AR.3.5X75	3.5	20.5	155.0	80.0	0.6	31.0	75.0	3.5
AR.3X75	3.0	16.0	145.0	70.0	0.5	17.0	75.0	3.0
AR.4X100	4.0	24.0	190.0	90.0	0.8	45.0	100.0	4.0
AR.4X150	4.0	24.0	240.0	90.0	0.8	50.0	150.0	4.0
AR.5.5X100	5.5	28.0	200.0	100.0	1.0	71.0	100.0	5.5
AR.5.5X150	5.5	28.0	250.0	100.0	1.0	80.0	150.0	5.5
AR.5.5X200	5.5	28.0	250.0	100.0	1.0	80.0	150.0	5.5
AR.6.5X100	6.5	30.0	210.0	110.0	1.2	102.0	100.0	6.5
AR.6.5X150	6.5	30.0	260.0	110.0	1.2	114.0	150.0	6.5
AR.6.5X200	6.5	30.0	310.0	110.0	1.2	226.0	200.0	6.5
AR.8X150	8.0	30.0	260.0	110.0	1.2	141.0	150.0	8.0