

14134M-58 / -98




Bit Holder complete with Bit, Inhex
Klingenhalter komplett mit Klinge, Innensechskant
Porte embouts avec bit 6-pans creux



14134T-58 / -98 (T)



Bit Holder complete with TORX® Bit
Klingenhalter, komplett mit TORX® Klinge
Porte embouts avec bit TORX®

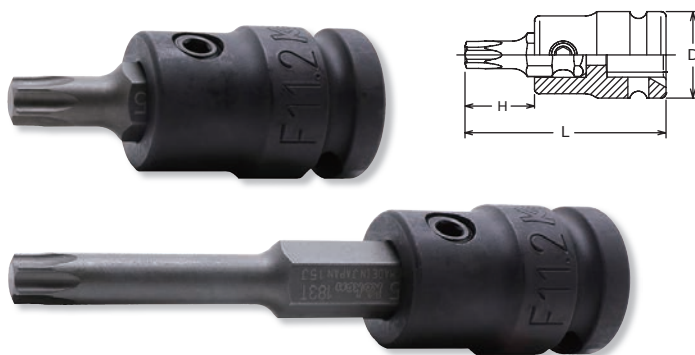

14134T-58 / -98 (IP)




Bit Holder complete with TORXPLUS® Bit
Klingenhalter, komplett mit TORXPLUS® Klinge
Porte embouts avec bit TORXPLUS®



14134X-58 / -98 (XZN)



Bit Holder complete with XZN Bit
Klingenhalter, komplett mit XZN Klinge
Porte embouts avec bit XZN

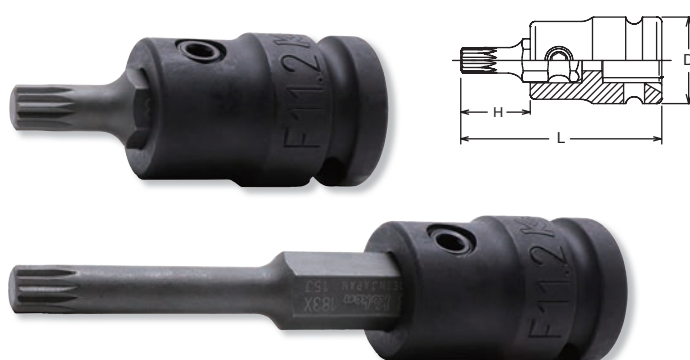

14134M-58 (mm)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
3	25	20	58	6	105	10	*1
4	25	20	58	6	105	10	*1
5	25	20	58	6.5	105	10	*1
6	25	20	58	7.5	108	10	*1
8	25	20	58	9.5	110	10	*1
10	25	20	58	-	116	10	*1
12	25	20	58	-	120	10	*1
14	25	20	58	-	125	10	*1

14134M-98 (mm)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
3	25	60	98	6	124	5	*1
4	25	60	98	6	125	5	*1
5	25	60	98	6.5	126	5	*1
6	25	60	98	7.5	129	5	*1
8	25	60	98	9.5	137	5	*1
10	25	60	98	-	147	5	*1
12	25	60	98	-	155	5	*1
14	25	60	98	-	169	5	*1

*1 C-Ring=C41, Pin/O-Ring=A41/B41

→ P110-111

14134T-58 (T)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
T30	25	20	58	6	108	10	*1
T40	25	20	58	6.9	110	10	*1
T45	25	20	58	8	112	10	*1
T50	25	20	58	9	116	10	*1
T55	25	20	58	11.4	120	10	*1
T60	25	20	58	13.5	128	10	*1

14134T-98 (T)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
T30	25	60	98	6	125	5	*1
T40	25	60	98	6.9	127	5	*1
T45	25	60	98	8	131	5	*1
T50	25	60	98	9	135	5	*1
T55	25	60	98	11.4	145	5	*1
T60	25	60	98	13.5	157	5	*1

*1 C-Ring=C41, Pin/O-Ring=A41/B41

→ P110-111

14134T-58 (IP)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
30IP	25	20	58	6	108	10	*1
40IP	25	20	58	6.8	110	10	*1
45IP	25	20	58	8	112	10	*1
50IP	25	20	58	9	116	10	*1
55IP	25	20	58	11.4	120	10	*1
60IP	25	20	58	13.5	128	10	*1

14134T-98 (IP)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
30IP	25	60	98	6	125	5	*1
40IP	25	60	98	6.8	127	5	*1
45IP	25	60	98	8	131	5	*1
50IP	25	60	98	9	135	5	*1
55IP	25	60	98	11.4	146	5	*1
60IP	25	60	98	13.5	159	5	*1

*1 C-Ring=C41, Pin/O-Ring=A41/B41

→ P110-111

14134X-58 (XZN)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
M 5	25	20	58	6	108	10	*1
M 6	25	20	58	6.2	110	10	*1
M 8	25	20	58	7.4	112	10	*1
M10	25	20	58	9.8	116	10	*1
M12	25	20	58	11.7	120	10	*1
M14	25	20	58	13.5	128	10	*1

14134X-98 (XZN)	D (mm)	H (mm)	L (mm)	R (mm)	(g)	(pcs.)	
M 5	25	60	98	6	124	5	*1
M 6	25	60	98	6.2	126	5	*1
M 8	25	60	98	7.4	129	5	*1
M10	25	60	98	9.8	144	5	*1
M12	25	60	98	11.7	149	5	*1
M14	25	60	98	13.5	159	5	*1

*1 C-Ring=C41, Pin/O-Ring=A41/B41

→ P110-111

The items with ⚠ have larger output size than 7/16" input hex drive.
Due to this design the Maximum output torque rating is less than standards.